




Barras Macho-Macho



Descripción	Diám. Ø"	Rosca		Longitud			Ø Agujero Barrido	Peso aproximado	
		A	B	mm	ft.	in.		Kg	lb
R32/R32-R32-0610	RND32	R32	R32	610	2		11.7	2.9	6.4
R32/R32-R32-0915	RND32	R32	R32	915	3		11.7	4.6	10.1
R32/R32-R32-1220	RND32	R32	R32	1220	4		11.7	6.3	13.9
R32/R32-R32-1525	RND32	R32	R32	1525	5		11.7	8.0	17.6
R32/R32-R32-1830	RND32	R32	R32	1830	6		11.7	9.7	21.3
R32/R32-R32-2435	RND32	R32	R32	2435	8		11.7	13.0	28.6
R32/R32-R32-3050	RND32	R32	R32	3050	10		11.7	16.5	36.3
R32/R32-R32-3660	RND32	R32	R32	3660	12		11.7	19.8	43.6
R32/R32-R32-4265	RND32	R32	R32	4265	14		11.7	23.2	51.0
R39/R38-R38-1220	RND39	R38	R38	1220	4		14.5	9.5	20.9
R39/R38-R38-1830	RND39	R38	R38	1830	6		14.5	14.4	31.7
R39/R38-R38-2435	RND39	R38	R38	2435	8		14.5	19.3	42.5
R39/R38-R38-3050	RND39	R38	R38	3050	10		14.5	24.3	53.5
R39/R38-R38-3660	RND39	R38	R38	3660	12		14.5	29.2	64.2
R39/R38-R38-4265	RND39	R38	R38	4265	14		14.5	34.1	75.0
R39/T38-T38-1220	RND39	T38	T38	1220	4		14.5	9.5	20.9
R39/T38-T38-1525	RND39	T38	T38	1525	5		14.5	12.0	26.4
R39/T38-T38-1830	RND39	T38	T38	1830	6		14.5	14.4	31.7
R39/T38-T38-2435	RND39	T38	T38	2435	8		14.5	19.3	42.5
R39/T38-T38-3050	RND39	T38	T38	3050	10		14.5	24.3	53.5
R39/T38-T38-3660	RND39	T38	T38	3660	12		14.5	29.2	64.2
R39/T38-T38-4000	RND39	T38	T38	4000	13	1 3/8	14.5	32.0	70.4
R39/T38-T38-4265	RND39	T38	T38	4265	14		14.5	34.1	75.0
R46/T45-T45-3050	RND46	T45	T45	3050	10		17.0	33.6	73.9
R46/T45-T45-3660	RND46	T45	T45	3660	12		17.0	40.4	88.9
R46/T45-T45-3660	RND46	T45	T45	3660	12		17.0	40.4	88.9
R46/T45-T45-4265	RND46	T45	T45	4265	14		17.0	47.1	103.6
R46/T45-T45-6095	RND46	T45	T45	6095	20		17.0	67.5	148.5
R52/T51-T51-3050	RND52	T51	T51	3050	10		21.5	41.3	90.9
R52/T51-T51-3660	RND52	T51	T51	3660	12		21.5	49.8	109.6
R52/T51-T51-4265	RND52	T51	T51	4265	14		21.5	58.1	127.8
R52/T51-T51-6095	RND52	T51	T51	6095	20		21.5	83.5	183.7
R52/T51-T51-7400	RND52	T51	T51	7400	24		21.5	101.6	223.5
R60/T60-T60-3660	RND60	T60	T60	3660	12		22.6	68.8	151.4
R60/T60-T60-4265	RND60	T60	T60	4265	14		22.6	80.3	176.7
R60/ST58-ST58-3660	RND60	ST58	ST58	3660	12		22.6	68.8	151.4
R60/ST58-ST58-4265	RND60	ST58	ST58	4265	14		22.6	80.3	176.7

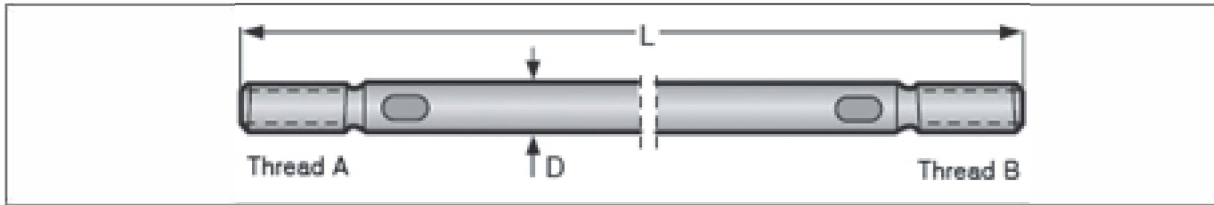