




Barras Macho-Hembra



Descripción	Diám. Ø"	Rosca		Longitud			Ø Agujero Barrido	Peso aproximado	
		A	B	mm	ft.	in.		Kg	lb
R32/R32-R32-0915	RND32	R32	R32	915	3		11.7	5.3	11.7
R32/R32-R32-1220	RND32	R32	R32	1220	4		11.7	7.3	16.1
R32/R32-R32-1525	RND32	R32	R32	1525	5		11.7	8.9	19.6
R32/R32-R32-1830	RND32	R32	R32	1830	6		11.7	10.5	23.1
R32/R32-R32-2435	RND32	R32	R32	2435	8		11.7	13.8	30.4
R32/R32-R32-3050	RND32	R32	R32	3050	10		11.7	17.1	37.6
R32/R32-R32-3660	RND32	R32	R32	3660	12		11.7	20.9	46.0
R32/R32-R32-4265	RND32	R32	R32	4265	14		11.7	23.9	52.6
R39/T38-T38-1220	RND39	T38	T38	1220	4		14.5	10.6	23.3
R39/T38-T38-1525	RND39	T38	T38	1525	5		14.5	13.1	28.7
R39/T38-T38-1830	RND39	T38	T38	1830	6		14.5	15.6	34.3
R39/T38-T38-3050	RND39	T38	T38	3050	10		14.5	25.6	56.3
R39/T38-T38-3660	RND39	T38	T38	3660	12		14.5	30.4	66.9
R39/T38-T38-4265	RND39	T38	T38	4265	14		14.5	35.2	77.4
R46/T45-T45-1525	RND46	T45	T45	1525	5		17.0	18.2	40.0
R46/T45-T45-1830	RND46	T45	T45	1830	6		17.0	21.5	47.3
R46/T45-T45-3050	RND46	T45	T45	3050	10		17.0	35.7	78.5
R46/T45-T45-3660	RND46	T45	T45	3660	12		17.0	42.5	93.5
R46/T45-T45-4265	RND46	T45	T45	4265	14		17.0	49.5	108.9
R46/T45-T45-6095	RND46	T45	T45	6095	20		17.0	69.0	151.8
R52/T51-T51-1830	RND52	T51	T51	1830	6		21.5	27.3	60.1
R52/T51-T51-3660	RND52	T51	T51	3660	12		21.5	52.5	115.5
R52/T51-T51-4265	RND52	T51	T51	4265	14		21.5	61.0	134.2
R52/T51-T51-5490	RND52	T51	T51	5490	18		21.5	78.0	171.6
R52/T51-T51-6095	RND52	T51	T51	6095	20		21.5	85.6	188.3
R60/T60-T60-3660	RND60	T60	T60	3660	12		22.6	76.2	167.6
R60/T60-T60-4265	RND60	T60	T60	4265	14		22.6	86.7	190.7
R60/T60-T60-6095	RND60	T60	T60	6095	20		22.6	132.6	291.7
R60/ST58-ST58-3660	RND60	ST58	ST58	3660	12		22.6	76.2	167.6
R60/ST58-ST58-4265	RND60	ST58	ST58	4265	14		22.6	86.7	190.7
R60/ST58-ST58-5490	RND60	ST58	ST58	5490	18		22.6	109.6	241.1

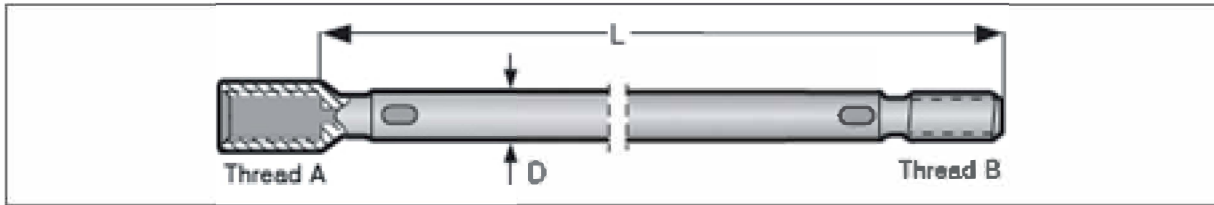